


三通直动式电磁阀

3 Port Direct Operation Solenoid Valve


TS10 Series

图形符号




Common Specification (共同规格)

Fluid(流体)	Air, Inert gas (空气, 惰性气体)
Port Size(接管口径)	Rc(PT) 1/8, 1/4, G1/8, 1/4
Ambient Temp.(环境温度)	0°C~60°C
Fluid Temp.(周围温度)	5°C~80°C
Response Time(应答时间)	≤5ms(0.5Mpa时)
Power Consumption(电力消耗)	DC24V: 0.8W DC12V: 0.6W
Max.Cycles(最大操作频率)	30c/s(次/秒)
Operating Pressure(使用压力)	0~0.75Mpa
Manual Override(手动操作)	Push Button(按钮式)
Coil Insulation(绝缘等级)	Class F (F级)
Allowable Voltage(容许电压变动范围)	Rated Voltage(额定电压)±10%
Effective Sectional Area(有效截面积)	3.2mm ² (CV=0.18)
Orifice(公称通径)	P=Ø0.7, R=Ø1.0(mm)

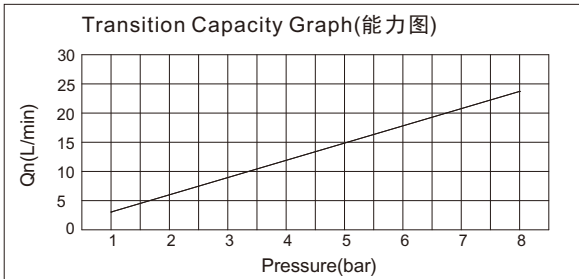

Solenoid Coil Type (线圈类型)

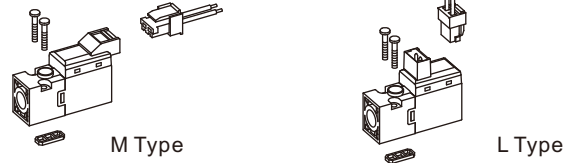

How To Order (型号表示方法)

TS1 0 - M - L - D4

Specification Code
规格代码

TS1
Series

Function
阀形式

0 3/2 Normally Closed(N.C)(常闭)
1 3/2 Normally Open (N.O)(常开)

Orifice
公称通径

L Orifice(公称通径) 0.6mm
M Standard(标准通径) 0.7mm
H Orifice(公称通径) 0.9mm

Solenoid Coil Type
线圈类型

L 90 Degree Plug-in Wire Assembly
With LED(90°直角带灯)
M 180 Degree Plug-in Wire Assembly
With LED(180°带灯)

Voltage
电压

D4 DC 24V
D2 DC 12V
D6 DC 6V

Dimensions(mm)(外形尺寸图(毫米))

