


三通先导式电磁阀

3 Way Pilot Type Solenoid Valve

TSM300S Series



Common Specification (共同规格)

Fluid(流体)	Compressed Air, Inert gas(压缩空气, 惰性气体)
Eff. Sectional Area (有效截面积)	9.0mm ²
Operating Pressure(使用压力)	0.15~0.7Mpa
Max. Cycles(最大工作频率)	8c/s
Response Time(5bar)(反应时间)	25ms or Less
Lubrication(润滑)	Not Required(无需润滑)
Manual Override(手动操作)	Push Button (Standard)(按钮式)(标准), Lever Lock (锁定式)
Power Consumption (电力消耗)	Holding-DC(持续) : 0.65W(24V):27.0mA/12V:54.0mA)
Allowable Voltage(容许电压变动范围)	Rated Voltage(额定电压)±10%
Ambient & Fluid Temp.(环境及介质温度)	5°C~60°C
Coil Insulation(绝缘等级)	Class F or Equivalent(F级或相同级别)

*Please Use Turbine Oil 1st-grade ISO VG32#, If Required.
若需要润滑油请使用透平1号油ISOVG32


How To Order (型号表示方法)

TSM3 1 3 S - 5 LZ - M5 - S


Solenoid 电磁线圈	Voltage 电压	Connection 接电方式	Port Size 接管口径	Manual Override 手动操作
1 Normally Closed(常闭)	5 DC24V	LZ L Type Terminal(L型插座式)	M5 M5x8	Nil(空) Push Button (Standard)(按钮式)(标准)
2 Normally Open(常开)	6 DC12V	MZ M Type Terminal(90°)(M型插座式)		S Lever Lock (锁定式)
3 Double(双电)				

Dimensions(mm)(外形尺寸图(毫米))

TSM313S-□LZ

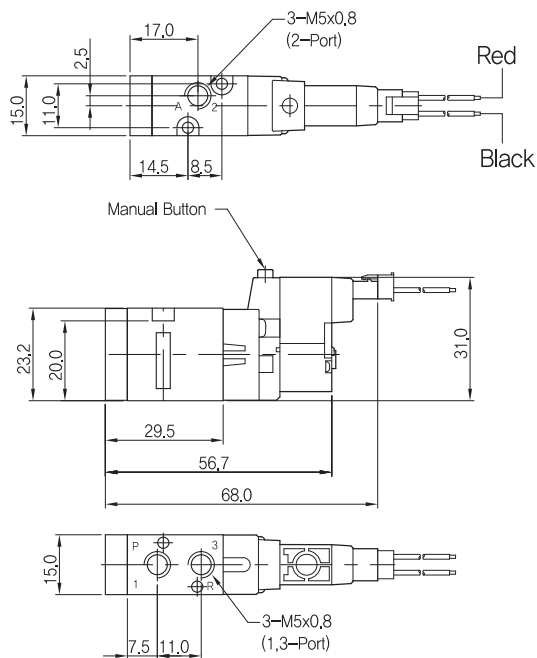

TSM323S-□LZ

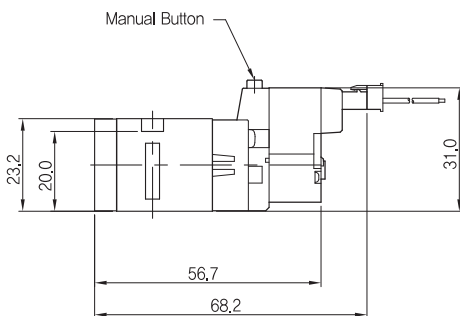


三通先导式电磁阀

3 Way Pilot Type Solenoid Valve


TSM300S Series

Dimensions(mm)(外形尺寸图(毫米))


TSM333S-□LZ

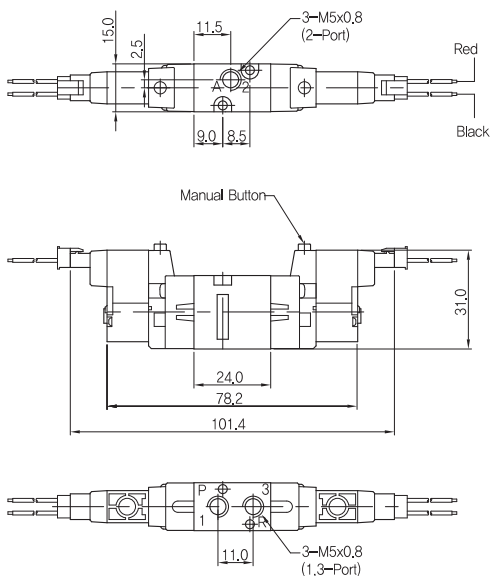

TSM333S-□MZ



Manifold (汇流板)

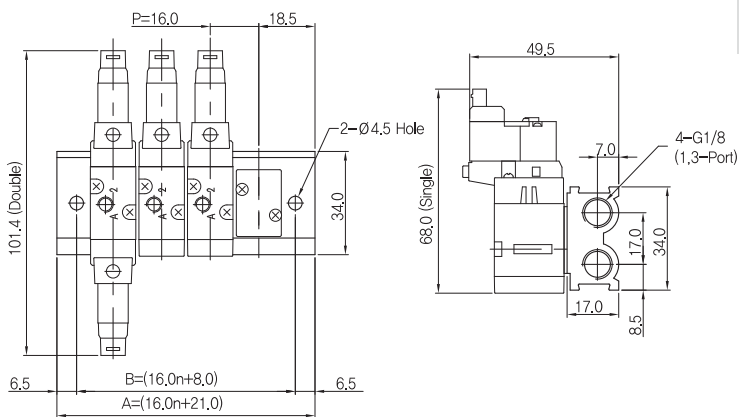

How To Order (型号表示方法)

TSS3M 3 - 20 - 04 1

Series 系列	
3 TSM300	

No. of Station 位置数目	
02	2 Valves
03	3 Valves
12	12 Valves

Blanking Plate



Manifold Gasket

A,B : Dimensions(尺寸)

n=Station(位数)

Item	Station	2	3	4	5	6	7	8	9	10	11	12
B		40.0	56.0	72.0	88.0	104.0	120.0	136.0	152.0	168.0	184.0	200.0
A		53.0	69.0	85.0	101.0	117.0	133.0	149.0	165.0	181.0	197.0	213.0