


Features(产品特点)

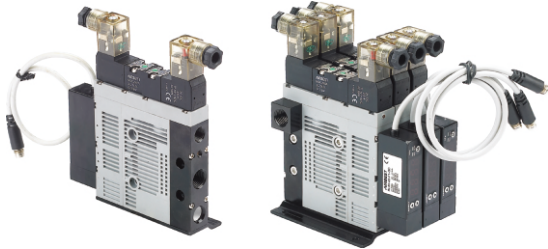

- Integrate with control, filter and silence
- Multistage nozzles take advantage of compressed air more efficiently
- Thin design, easy installation
- Many options for combination of control valve and vacuum switch
- Digital vacuum monitoring unit is available, LED display, east adjustment
- 集控制、过滤、消音于一体
- 多级喷嘴能更高效的利用压缩空气
- 轻薄型设计，安装方便
- 有多种可供选择的控制阀和真空开关的组合形式
- 可选数字式真空监控装置，LED显示，调节方便

Model(型号规格)

Model (型号)	Specification (规格)	Combination mode (组合方式)	Vacuum Stack quantity (组合板数)	Control Valve (控制阀)	Vacuum Switch (Optional) (真空开关(选配))
ASM-Large Flow (流量型)	05	(无-单体型)	2	NO-Normally open (常开)	N ₁ -2NPN output(输出) & Analog output(输出)
	10	Z-Combined type with concentrated air supply (组合式集中供气)	3		
	15	M-Combined type with concentrated air supply and exhaust (组合式集中供气、排气)	4	NC-Normally close (常闭)	N ₂ -2NPN output(输出)
	20		5		
			6		
	7		N ₃ -2NPN output(输出) & Analog output(输出)		
	8		N ₄ -2NPN output(输出)		

△ASM05-Z4-NC-N₁

Technical Parameters(性能参数)

Model (型号)	Max. Vacuum Level (最大真空度) -kPa	Max. Vacuum Flow (最大真空流量) l/min	Air Supply Pressure (供气压力) bar	Air Consumption (空气消耗量) l/m	Noise (噪音) dB	Weight (重量) g
ASM05	85	48	4~6	32~42	50~65	250
ASM10		85		40~75	50~65	250
ASM15		115		70~90	50~65	250
ASM20		132		96~122	50~65	250

Vacuum Flow(l/min)at Different Vacuum Levels(-kPa)(不同真空度(-kPa)的真空流量(l/min))

Model (型号)	-kPa										Max.vacuum level (最大真空度)
	0	10	20	30	40	50	60	70	80		
ASM5	41	20	12	10	8.5	7	4.5	2.6	0.5	-85kPa	
ASM10	75	48	25	19	15	12	7	2.5	0.8		
ASM15	102	65	41	28	22	18	12	5	1.5		
ASM20	120	74	45	35	27	22	16	9	2.5		

Evacuation Time(s/l)to Teach Different Vacuum Levels(-kPa)(不同真空度(-kPa)的抽气时间(s/l))

Model (型号)	-kPa								
	10	20	30	40	50	60	70	80	
ASM5	0.12	0.36	0.9	1.4	2.2	3.4	4.2	7	
ASM10	0.1	0.31	0.56	0.9	1.5	2.3	3.2	4.7	
ASM15	0.07	0.25	0.43	0.76	1.2	1.9	2.6	4	
ASM20	0.05	0.14	0.32	0.68	0.98	1.6	2.1	2.8	

集成式真空发生器 Compact Vacuum Pump

AIRBEST Series

ASM Series

Dimensions(mm)(外形尺寸图(毫米))

