



五通直动型电磁阀


5 Port Direct-Acting Type Solenoid Valve

TVS4000 Series

图形符号



TVS4130-043G



TVS4230-044G

Common Specification (共同规格)

Working Medium (工作介质)	Air, Vacuum, Inert gas(空气, 真空, 惰性气体)
Ambient Temperature(环境温度)	-20°C~50°C
Fluid Temperature(流体温度)	5°C~60°C
Working-pressure(使用压力)	0~1MPa
Effective Sectional Area (有效截面积)	Rc(PT)3/8: 43mm ² (CV=2.4) Rc(PT)1/2: 49mm ² (CV=2.72)
Voltage Range(电压范围)	±10%
Power Consumption(耗电量)	Start(启动):100/90VA(50/60Hz) Holding(把持):20/14VA(50/60Hz)
Response Time(应答时间)(0.5Mpa)	≤30ms
Max. Operating Frequency(最高动作频率)	单动: 5 Cycle / Sec 双动: 3 Cycle / Sec
Coil Insulation(绝缘等级)	Class B(B级)

Features(特征)

- Direct acting type
- Large capacity valve can be used in combination with large actuator.
- Non-lubrication type and with dust proof Metal sealing.
- Due to the balance spool type neither of the ports being supplied with pressure will affect the valve operation. .
- 直动式
- 适用于大型驱动机械的大容量阀门
- 金属密封方式, 耐灰尘, 无需给油
- 平衡阀芯使之无论从任何一个端口供气都不会影响操作

How To Order (型号表示方法)

TVS4 1 30 - 03 3 G


Function 功能
1 Single Acting(单动)
2 Double Acting(双动)

Port Size 接管口径
03 Rc(PT)3/8
04 Rc(PT)1/2

Rated Voltage 额定电压
3 AC100V/110V 50/60Hz
4 AC200/220V 50/60Hz

Dimensions(mm)(外形尺寸图(毫米))

TVS4130

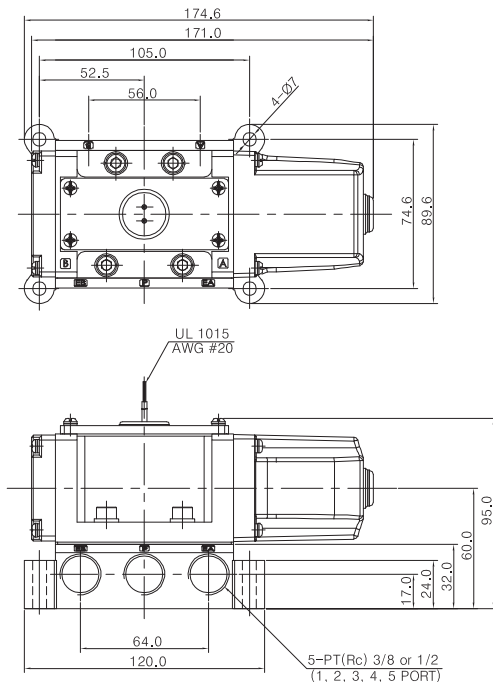

TVS4230

