


不锈钢气控梭阀

Pneumatic Shuttle Valve

PSF Series

图形符号



Common Specification (共同规格)

Fluid Pressure(管道压力)	Max 1.6Mpa(232psi)
Control Pressure(控制压力)	0.3~0.8MPa(43.5~116psi)
Control Fluid(控制介质)	Neutral gas, Air(中性气体或空气)
Body Material(阀体材料)	CF8M/CF8
Seals Material(密封材质)	EPDM(三元乙丙)/FKM(VITON)(氟橡胶)
Applicable Fluid(适用介质)	FKM-Suitable for most fluid, except for steam. (FKM适用于绝大多数介质, 蒸汽除外) EPDM-Suitable for steam and hot water, unsuitable for oils, greases, fuels etc. (EPDM适用于热水和蒸汽, 不适用于油脂类, 燃料等)
Fluid Temperature(介质温度)	-20°C~+ 150°C
Ambient Temperature(环境温度)	-20°C~+ 80°C
Control Type(控制形式)	Normally closed, Normally open, Double acting (单作用常闭、常开, 双作用常闭, 双作用自由态)
Connection(连接形式)	Thread(BSP, NPT)(螺纹式)

How To Order (型号表示方法)

PSF 10 - 304 O

Size 规格

10	DN10
15	DN15
20	DN20
25	DN25
32	DN32
40	DN40
50	DN50


Material 阀体材质

304	不锈钢304
316	不锈钢316

Valve Operating 阀门状态

O	Normally Open(常开)
SC	Normally Closed(常闭单作用)
DC	Double Acting With Spring(常闭双作用)
D	Double Acting (双作用自由态)

Dimensions(mm)(外形尺寸图(毫米))

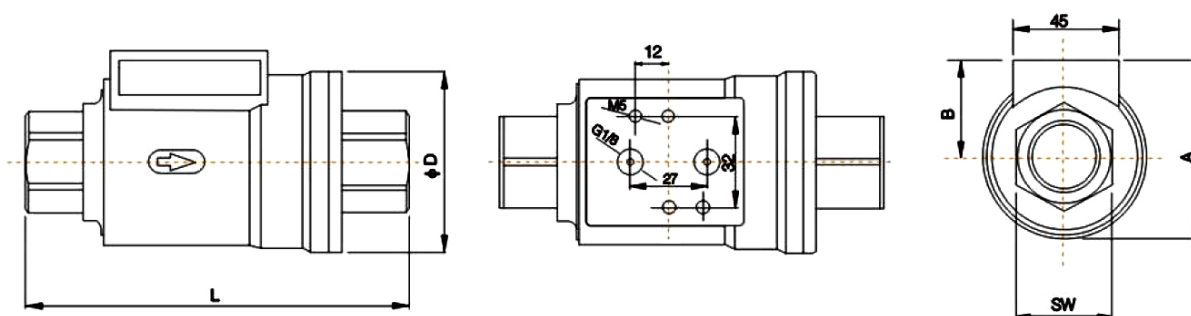

Size(规格)	DN10	DN15	DN20	DN25	DN32	DN40	DN50
Thread End(接口尺寸)	3/8"	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"
A(mm)	56	61	72	78	94	104	116
D(mm)	46	52	64	69	86	96	108
SW(mm)	22	26.5	32	41	50	56	70
B(mm)	33	35	40	43	51	56	62
L(mm)	98	112	135	143	165	180	207
Weight(重量)(Kg)	0.80	1.00	1.50	1.92	3.06	3.76	5.71