



Features(产品特点)

- The vacuum pump has a straight through design, hence they are non-clogging and maintenance free, and it is particular for transferring particles, powders. High flow can be achieved with in line bore sizes up to 38mm.
- 此系列真空发生器是直通设计，在输送物料时无堵塞且无需维护，适用于输送颗粒、粉末及块状物体等。这些发生器有不同规格孔径，最高流量孔径可达38mm。

Specifications(技术规格)

Max.vacuum Level(最大真空度)	-35kPa
Max.vacuum Flow Rate(最大真空流量)	5610l/m
Air Supply Pressure(供气压力)	4-6bar Max.7bar(最大7bar)
Air Supply Type(供气类型)	Dry Compressed Air(干燥的压缩空气)

How To Order(型号表示方法)

ACPF 2-3 - AL

① ②

① Model(规格)



2-3	7-6
3-3	15-3
5-6	15-6

② Material(材料)

AL-Aluminum(AL-铝)
SS-Stainless Steel(SS-不锈钢)


Dimensions (mm)(外形尺寸(毫米))

ACPF3-3

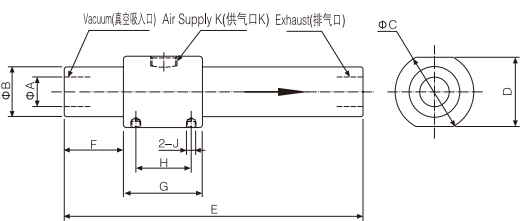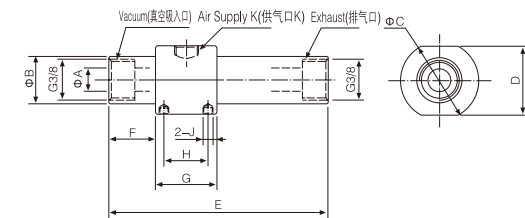

Applications(应用实例)

- Transferring materials(真空输送物料)
- Seledge removal intrimming operation(清除各种造纸及原料加工边线)
- Convy wheat, corn(输送小麦、玉米等谷物)
- Transfer powder detergent and plastic powder(输送洗衣粉和塑料粉)
- Chip removal in drilling operation (去除钻孔工序中的碎片)
- Powder removal in grinding operation (去除发动机配件等研磨工序中的粉末)

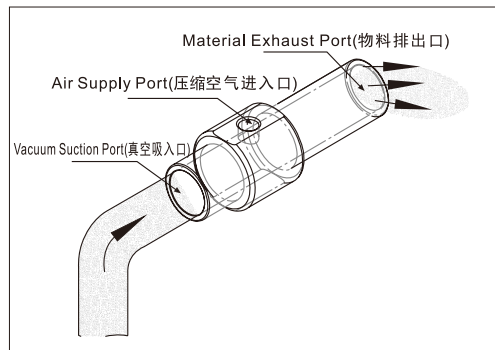

Parameters(参数)

Model(型号)	Air Velocity (空气速度) ft/s	Vacuum Fow (真空流量) l/m	Vacuum Level (真空度) -kPa	Air Consumption(空气消耗量)(l/m)	
				2.8bar	5.5bar
ACPF2-3	485	295	26	85	160
ACPF3-3	328	425	16	95	170
ACPF5-6	361	870	35	395	680
ACPF7-6	325	1825	28	790	1365
ACPF15-3	223	4400	4.4	405	695
ACPF15-6	270	5610	9	790	1365

Model(型号)	Dimension(尺寸规格)									
	ΦA	ΦB	ΦC	D	E	F	G	H	J	K
ACPF2-3	6.5	18.5	32	30	89	19	25	18	M4	G1/8
ACPF3-3	9.5	18.5	32	30	89	19	25	18	M4	G1/8
ACPF5-6	12.5	24	38	34	140	25.5	32	23	M4	G1/4
ACPF7-6	19	32	50	45	190	38	50	35	M4	G3/8
ACPF15-3	25	38	59	55	198	40	56	40	M4	G3/8
ACPF15-6	38	49.6	69	65	205	40	60	42	M4	G3/8